

# THE CITY OF NAPOLEON

## BUILDING & ZONING DEPARTMENT

255 W. RIVERVIEW

(419)592-4010

Electrical Permit

Page 1 of 1

Permit Number: EL2005-54

Printed: 8/25/2005

**Property Address: 325 Carey St.**

**Applicant** Tri-County Roofing  
**Address:** 13771 Co Rd 162

**Approval Date:** 8/25/2005

Paulding, OH 45879

**Phone:** 419-399-3964

### Owners

**Name:** Jesusa Gonzalez  
**Address:** 325 Carey St.

**Phone:** 419-592-0404

**Contractors** Tri-County Roofing  
**Address:** 13771 Co Rd 162  
Paulding, OH 45879


**Phone** 419-399-3964

### Fees and Receipts:

Number	Description	Amount
FEE2005-654	circuits (Auto)	\$60.00
FEE2005-655	electrical	\$15.00

**Total Fees:** \$75.00

**Description of work to be done:** Electrical upgrade 15 new circuits

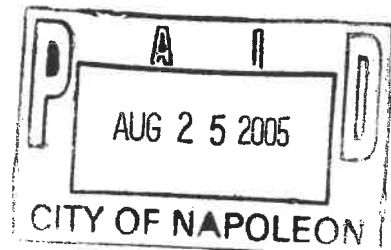

**Applicant signature:** \_\_\_\_\_ **Date:** \_\_\_\_\_





# CITY OF NAPOLEON

## ELECTRIC METER BASE RELEASE FORM

### THIS DOCUMENT ENTITLES THE HOLDER TO "ONE" ELECTRIC METER BASE

(Please pickup at the City Operations Garage 1775 Industrial Drive)

**Permit # EL2005-54**

**Date Issued: 08/25/05**

**Job Location**      **325 Carey St.**  
**Work Description**    Electrical upgrade

**Owner: Juesusa Gonzales**  
**Address 325 Carey St.**  
**Owner Phone: 419-592-0404**

**Contractor : Tri-County Roofing**  
**Contractor Phone: 419-399-3964**

Electric Service Upgrade       New Service Installation:   
Industrial:     Commercial     Residential:     1 Phase     3 Phase:   
**Size of Service:**    100 Amp:     150 Amp:     200 Amp:     400 Amp:     Other: \_\_\_\_\_  
**Hub Size:** 11/4"     11/21"     2"   
**Desired Voltage:**    120/240:       Other: \_\_\_\_\_  
Underground Service:     Overhead Service:

Date Completed: \_\_\_\_\_      Approved By: \_\_\_\_\_

Old Meter Number: \_\_\_\_\_      New Meter Number: \_\_\_\_\_

Comments: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_



# CITY OF NAPOLEON GENERAL PERMIT APPLICATION

THIS APPLICATION IS FOR RESIDENTIAL CONSTRUCTION INCLUDING BUILDING, ELECTRICAL, PLUMBING, MECHANICAL, DEMOLITIONS, REMODELING.

DATE: 8-17-05 JOB LOCATION: 325 Carey St

OWNER: Jesusa Gonzalez PHONE: 419-592-0404

OWNER ADDRESS: 325 Carey St CITY: Napoleon ZIP: 43545

CONTRACTOR: Tri-County Roofing Inc PHONE: 419-592-0404

CONTRACTOR LICENSED WITH THE CITY OF NAPOLEON?: YES:  NO:

DESCRIPTION OF WORK TO BE PERFORMED: see attached specs

### PLEASE MARK THE TYPE OF WORK YOU WILL BE PERFORMING

- |  |  |
|--|--|
| <input type="checkbox"/> A/C ADD ON                            | <input type="checkbox"/> REMODELING              |
| <input type="checkbox"/> BOILER REPLACEMENT                    | <input type="checkbox"/> ROOFING                 |
| <input type="checkbox"/> CURBING                               | <input type="checkbox"/> SEWER REPAIRS**         |
| <input type="checkbox"/> DECKS *                               | <input type="checkbox"/> SIDEWALK*               |
| <input type="checkbox"/> DRIVEWAY*                             | <input type="checkbox"/> SIDING                  |
| <input checked="" type="checkbox"/> ELECTRICAL SERVICE UPGRADE | <input type="checkbox"/> STORAGE SHED*           |
| <input type="checkbox"/> ELECTRICAL SERVICE NEW                | <input type="checkbox"/> SWIMMING POOL*          |
| <input type="checkbox"/> FENCE*                                | <input type="checkbox"/> FURNACE REPLACEMENT     |
| <input type="checkbox"/> ADDITIONS*                            | <input type="checkbox"/> TEMP ELECTRIC           |
| <input type="checkbox"/> FURNACE NEW                           | <input type="checkbox"/> WATER TAP (size _____") |
| <input type="checkbox"/> LAWN METER                            | <input type="checkbox"/> WINDOWS                 |
| <input type="checkbox"/> PLUMBING                              | <input type="checkbox"/> ZONING                  |

\*PLEASE INCLUDE A PICTURE SHOWING MEASUREMENTS FROM EXISTING STRUCTURES AND PROPERTY LINES. INDICATING THE TYPE OF WORK YOU WISH TO PERFORM.

\*\* IF WORK REQUIRES GOING INTO THE STREET A STREET BOND IS REQUIRED!

FOR PERMIT COSTS PLEASE FILL OUT REVERSE SIDE.

## PERMIT COST WORKSHEET

JOB	BASE FEE	TOTAL
SIDING TOTAL SQ FT _____ X 1.00 +	\$5.00 =	\$ _____
ROOFING TOTAL SQ FT _____ X 1.00 +	\$5.00 =	\$ _____
WINDOWS # OF WINDOWS _____ X 1.00 +	\$5.00 =	\$ _____
ELECTRICAL # OF CIRCUITS <u>15</u> X 3.00 +	\$15.00 =	\$ <u>60.00</u>
ELECTRICAL SERVICE UPGRADE	\$15.00 =	\$ <u>15.00</u>
PLUMBING (INSIDE)	\$10.00 =	\$ _____
PLUMBING/SEWER (OUTSIDE)	\$25.00 =	\$ _____
WATER HEATER	\$5.00	\$ _____
SHED UNDER 200 SQ FT	\$ 5.00	\$ _____
FURNACE OR A/C (REPLACEMNT)	\$ 5.00	\$ _____
DEMOLITION	\$30.00	\$ _____
SIDEWALK REPLACEMENT/ NEW	\$25.00	\$ _____

ALL OTHER CONSTRUCTION, ALTERATIONS, REMODELING, SHEDS, DECKS & FENCES NOT LISTED ABOVE IS BASED ON COST OF WORK BEING PERFORMED.

COST OF WORK \$ \_\_\_\_\_ (SEE CHART) \$ 75.00

0.00	-	250.00	0.00
250.00	-	1,000.00	10.00
1,000.00	-	1,999.00	12.00
2,000.00	-	2,999.00	14.00
3,000.00	-	3,999.00	16.00
4,000.00	-	4,999.00	18.00
5,000.00	-	5,999.00	19.00
6,000.00	-	6,999.00	20.00
7,000.00	-	7,999.00	21.00
8,000.00	-	8,999.00	22.00
9,000.00	-	9,999.00	23.00
10,000.00	-	10,999.00	24.00

11,000.00	-	11,999.00	25.00
12,000.00	-	12,999.00	26.00
13,000.00	-	13,999.00	27.00
14,000.00	-	14,999.00	28.00
15,000.00	-	15,999.00	29.00
16,000.00	-	16,999.00	30.00
17,000.00	-	17,999.00	31.00
18,000.00	-	18,999.00	32.00
19,000.00	-	19,999.00	33.00
20,000.00	-	20,999.00	34.00
21,000.00	-	21,999.00	35.00
22,000.00	-	22,999.00	36.00



**Tri-County Roofing, Inc.**  
www.782roof.com  
13771 CR 162 Paulding OH 45879  
419-399-3964 419-782-ROOF 419-599-3964 419-238-7666 Fax 419-399-9662

**Job Number:**  
**Name:**  
**Phone:**  
**Alt. Phone:**

Springfield Enterprises

**Mailing Address:**

**Job Address:**  
325 Carey St  
Napoleon OH 43545

**JOB DESCRIPTION: Electrical Work for Jasusa Gonzalez**

The job is to be completed as per specifications by Springfield Enterprises. The below amount is the stated price to be paid for the electrical work completed.

Price \$ 7,760.00

This estimate includes all materials, labor, dump fees, permits, taxes, cleanup and disposal of all debris caused by said work. We will use a magnetic roller over the yard for nails, staples, et.

**PAYMENT:** Our normal payment terms are 50% upon the acceptance of the job and the balance due day of completion. Any other payment terms must be approved by management. A 1.97% interest charge per month (16.6% APR) will be added to outstanding balances upon completion of work. Your warranty information if applicable, will be sent to you in the mail. We also enclose a customer survey with the receipt. We really appreciate any comments you may have so that we may continue to serve our customers to the best of our ability.

Your signature is an acceptance of this proposal and its terms. This proposal expires in 30 days unless otherwise indicated.

**Estimator:**

*Ben Ford*

**Date:**

**Accepted by:**

*Alan Miller*

*Call me with start time!*

*THANKS*  
*[Signature]*





**Mast/meter/entrance** – Install a new service mast, extending approximately two feet (2') above the roof edge), complete with new service wire, mast conduit, and weather head. Install a new meter base at existing location. Below the meter, install a 100 amp service dis-connect and new service entrance electrical cable to the electrical panel.

**Electrical panel** – Install a 100 amp twenty space electrical panel near the rear entrance. Properly label all circuits.

**Electrical wiring** – Replace all ungrounded electrical from the electrical panel throughout the home to all electrical devices with properly sized AWG "Romex" with ground.

**Electrical devices** – Replace all electrical devices throughout the home with U.I. approved devices.

**Basement (unfinished)** – All wiring must be run along and/or through floor joists. All wiring run below floor joists must be installed in wall framing, conduit, or wire mould.

Replace the two (2) light fixtures in the south portion of the basement with enclosed fixtures on three-way switches, located at the top and bottom of basement stairs.

Replace the two (2) light fixtures in the north portion of the basement and install one (1) fixture in the stairway, with enclosed fixtures on a wall switch located on the partition wall.

Run a properly sized electrical wire feed, from a dedicated circuit in the panel, to the sump pump (single receptacle).

Install a receptacle, secured to the floor joists, with a weather resistant cover near the furnace area.

**Kitchen** – Replace the ceiling mounted light fixture. Fixture cost not to exceed \$30.00.

Install two (2) additional gfc protected wall receptacles. Locate one at each the west counter (north of sink) and the north counter (centrally located).

Install a range hood vent with light, above the range (below the proposed wall cabinet). Vent must direct exhaust to the exterior of the home.

**Bathroom** – Install a wall switched light bar near the sink area on the west wall.

Install a gfc protected receptacle near the sink.

**Bedroom #1** – Replace the ceiling mounted light fixture. Fixture cost not to exceed \$30.00.

Install two (2) additional wall receptacles. Locate one (1) on each the south and east walls.

**Diningroom** – Install two (2) additional wall receptacles. Locate one (1) on each the south wall (east of bedroom door) and the east wall.

Replace the ceiling mounted light fixture and install three-way wall switches to operate the light. Located the wall switches at each the south wall (west of kitchen entry) and the north wall (west of livingroom entry). Fixture cost not to exceed \$30.00.

Install a wall switch north of the entry to garage to control the light in the garage.

**Livingroom** – Remove all floor receptacles and cover with metal blank covers.

Install three (3) additional wall receptacles. Locate one (1) on the west wall and two (2) on the east wall (positioned to both sides of the windows).

Install three-way wall switches to operate the fan/light. Located the wall switches at each the south wall (west of dining entry) and the north wall (west of entry to sewing room).

**Sewing room** – Install two (2) additional wall receptacles. Locate at each the south wall (west of entry) and the north wall (centrally located).

Install a wall switch and ceiling mounted light fixture. Fixture cost not to exceed \$30.00.

**Bedroom #2 (east 2<sup>nd</sup> flr)** – Install three (3) additional wall receptacles. Locate at each the east, west, and south walls.

Install a wall switch and ceiling mounted light fixture. Fixture cost not to exceed \$30.00.

Replace the closet light with a wall switched, enclosed fluorescent fixture.

**Bedroom #3 (west 2<sup>nd</sup> flr)** – Install four (4) additional wall receptacles. Locate at each the east, west, north, and south walls.

Install a wall switch and ceiling mounted light fixture. Fixture cost not to exceed \$30.00.

Replace the closet light with a wall switched, enclosed fluorescent fixture.

**Smoke detectors** – Install SIX (6) U.L approved hardwired smoke detectors with battery back-up, wired in series. Locate ONE (1) in each bedroom, the upper hallway, the diningroom, and the basement.



**CO detector** – Install one (1) U.L approved hardwired CO detectors with battery back-up.  
Locate in the basement.

**Garage** – gfci protect all wall receptacles.

**Exterior** – Install two (2) gfci protected receptacle, with weather resistant covers. Locate at front of home and one (1) at the rear of home.

**ALL electrical work must be performed by qualified electrical technician(s) and conform to NEC.**

\$7,760.00

