

THE CITY OF NAPOLEON

BUILDING & ZONING DEPARTMENT

255 W. RIVERVIEW

(419)592-4010

Sidwealk/Curb Replacement Permit

Permit Number: SW2010-4

Page 1 of 1

Printed: 5/28/2010

ADDRESS:

755 Clinton St. W.

Applicant

Name: Steve Gerken

Address: 755 W. Clinton St.

Approval Date:

Owners

Name: Steve Gerken

Address: 755 W. Clinton St.

Napoleon, OH 43545

Contractors

Fees and Receipts:

Number

Description

Amount

Total Fees: \$0.00

Total Receipts: \$0.00

Replace sidewalk

APPLICANTS SIGNATURE: _____ DATE: _____

REMINDER: YOU MUST CALL (419)592-4010 FOR AN INSPECTION

Replace sidewalk

APPLICATION FOR CITY SIDEWALK AND/OR CURBING REPLACEMENT

Location of project 755 W. Clinton St.

Owner Name Steve Gerken

Address 755 W. Clinton St.

City Napoleon

Zip 43545

Phone 419-592-0425

Type of work to be performed: Curbing replacement , Sidewalk Replacement X

Total length of curbing to be replaced Total square footage of sidewalk to be replaced 300

Estimated cost 1200

It is required that the City approve the replacement of sidewalks and curbing before the work commences

All construction must comply with the latest City of Napoleon Engineering Specification and/or ODOT specifications whichever is applicable. Non-complaint work will not be eligible for reimbursement. **Specifications are available upon request.** Inspection is required by the City prior to replacement of concrete and after the work is completed to retain eligibility.

The city will reimburse the owner for sidewalk replacement in the right-of-way at a rate of one dollar and fifty cents (\$1.50) per square foot, if installed in accordance to City specifications. The City will reimburse the owner for curbing replacement in the right-of-way at a rate of twenty dollars (\$20.00) per linear foot, **if installed in accordance to City specification.**

Reimbursement is made to the owner of the property not the contractor. IT is required that the owner completes an invoice (provided by the City) for such work along with a paid copy of the invoice from the contractor who performed such work (if applicable).

Name of City registered contractor performing such work; (if there is no contractor involved mark Self)

Self
Steve Gerken
Signature of property owner

City Lic. #
5-19-10
Date

This form must be signed by the City Engineer prior to commencement of work in order to be eligible for reimbursement according to the above schedule. Inspection by the City is required prior to placement of concrete and after work is completed. A "WORK IN RIGHT OF WAY" PERMIT IS REQUIRED BEFORE WORK MAY COMMENCE.

This project as specified above is hereby approved for construction and is eligible for reimbursement in accordance with the schedule herein. All work must conform to the City of Napoleon specification.

[Signature]
City Engineer

05.19.10
Date

City Purchase order Number BG 100742

City Permit number SW2010-4

CITY OF NAPOLEON ZONING PERMIT APPLICATION

THIS APPLICATION IS FOR RESIDENTIAL DEMOLITIONS, FENCES, POOLS, SHEDS,
DRIVEWAYS, SIDEWALKS & SEWERS

SW2010-4

DATE 5/13/10 JOB LOCATION 755 W. Clinton St.
 OWNER Steve Gerken TELEPHONE # 419-966-4149
 OWNER ADDRESS 755 W. Clinton St.
 CONTRACTOR J. Hillis / Self CELL PHONE # _____
 DESCRIPTION OF WORK TO BE PERFORMED Sidewalk Replace

ESTIMATED COMPLETION DATE _____ ESTIMATED COST _____

DESCRIPTION	FEE	TOTAL COST
Demo Permit	(100.3100.46690) \$100.00	\$
Fence	0	\$
Pool	0	\$
Garage and Shed Under 200 SF (Detached)	0	\$
Driveway	0	\$
<input checked="" type="checkbox"/> Sidewalk/Curbing	0	\$ 0-
Sewer Outside	0	\$
Subtotal:		\$
		\$
TOTAL FEE:		\$

I FULLY UNDERSTAND THAT NO EXCAVATION, CONSTRUCTION OR STRUCTURAL ALTERATION, ELECTRICAL OR MECHANICAL INSTALLATION OR ALTERATION OF ANY BUILDING STRUCTURE, SIGN, OR PART THEREOF AND NO USE OF THE ABOVE SHALL BE UNDERTAKEN OR PERFORMED UNTIL THE PERMIT APPLIED FOR HEREIN HAS BEEN APPROVED AND ISSUED BY THE CITY OF NAPOLEON BUILDING/ZONING DEPARTMENT.

I hereby certify that I am the Owner of the named property, or that the proposed work is authorized by the Owner of record and that I have been authorized by the Owner to make this application as his/her authorized agent and I agree to conform to all applicable laws of the jurisdiction. In addition, if a permit for Work described in this application is issued, I certify that the code official or the code official's authorized representative shall have the authority to enter areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit.

I HEREBY ACKNOWLEDGE THAT I HAVE READ AND FULLY UNDERSTAND THE ABOVE LISTED INSTRUCTIONS.

SIGNATURE OF APPLICANT: Steve Gerken DATE: 5/13/10

PRINT NAME: Steve Gerken


BATCH #	CHECK #	DATE
---------	---------	------



4" CONCRETE WALK
(8" MIN. THICKNESS
WITHIN 5' OF DRIVEWAYS)

MIN. 4" THICK, COMPACTED
WITH CRUSHED LIMESTONE
BASE, #411, OR #304 LIMESTONE
(6" MIN. THICKNESS WITHIN 5' OF
DRIVEWAYS)

SIDEWALK SECTION

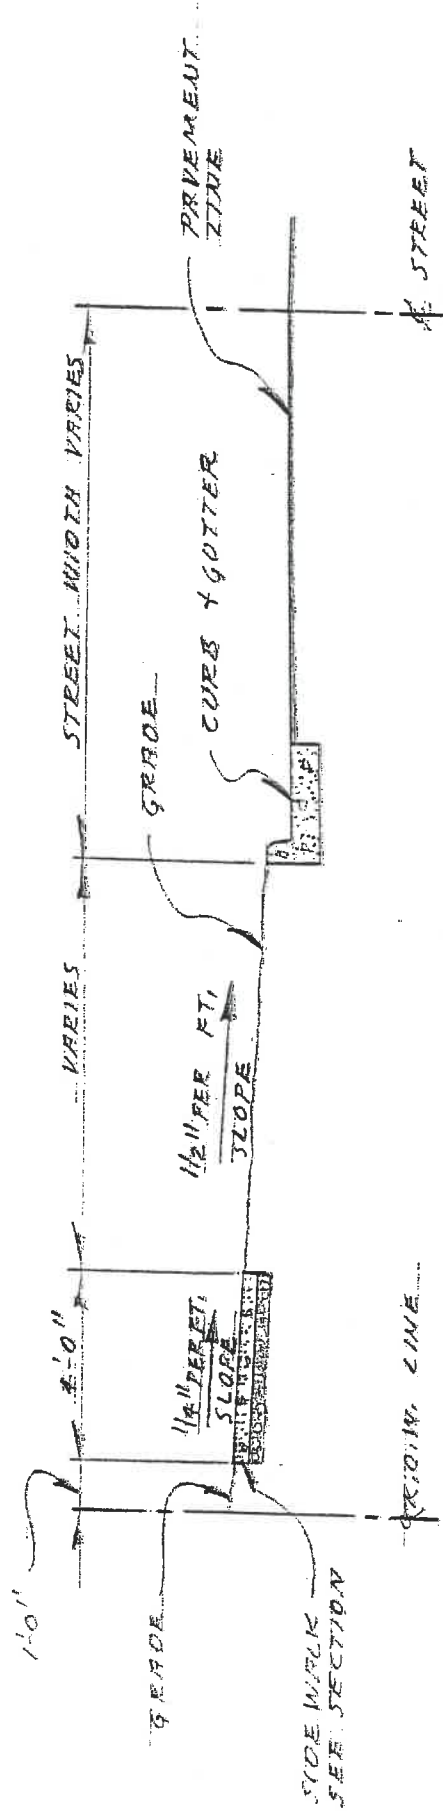

SIDEWALK LINE + ELEVATION DET.

City of Napoleon

Residential Sidewalk Specifications

I. Work Included

- A. Under this item the Contractor shall improve by construction, reconstruction or repairing as is necessary, public sidewalks between limits established by the Engineer.
- B. Sidewalks shall be at least four (4) inches in thickness and, in driveway crossings and within five (5) feet there of, six (6) inches in thickness. When sidewalks abut with the curb, the width shall be five (5) feet or as wide as the existing sidewalks; in either case, a minimum width of four (4) feet shall be required. Edge of walks parallel with the street shall be placed at least one (1) foot from the property line or meet existing sidewalks. The Engineering Department will give line and grade.
- C. Old concrete sidewalk material shall be removed and granular material used for fill if necessary, to meet grade.
- D. All work shall conform to the standard specifications published by the Ohio Department of Transportation (O.D.O.T.) and the City, in effect at the date of contract and the requirements under these specifications.

1. Referenced O.D.O.T. specifications as follows:

608. Concrete Walks

499. Concrete

511.15 Depositing and Curing Concrete in Cold Weather

II. Materials and Finish:

- A. A minimum of four (4) inches of ODOT item 304 or 411 crushed limestone base shall be provided and compacted in place.
- B. The concrete mix shall be ODOT Class C mix with 5 to 6% air entrainment. All surface area shall be broom finished and sealed with an Engineer approved concrete sealer. All joints shall be trowel-cut with a maximum joint spacing of 5 feet. The depth of cut shall be a minimum $\frac{1}{4}$ of the thickness of the slab. Expansion joints shall be placed at a maximum of 40 feet and at all intersecting walks. Admixtures shall only be added after approval of the City Engineer. Calcium Chloride shall **NOT** be added to the mix.
- C. Contact the City of Napoleon's Engineering Department for additional information when constructing concrete walks if the atmospheric temperature may drop below 40 degrees Fahrenheit in the first seven (7) days after construction.