

P E R M I T

CITY OF NAPOLEON
255 W. RIVERVIEW AVE
NAPOLEON, OHIO 43545

DIVISION OF BUILDING & ZONING
PH (419) 592-4010
FAX (419) 599-8393

PERMIT NO: 1345 DATE ISSUED: 09-25-02 ISSUED BY: BND

JOB LOCATION: 1500 GLENWOOD AVE EST. COST:

LOT #: SUBDIVISION NAME:

OWNER: MANUFACTURED HOMES UNLIMI AGENT: SELF
ADDRESS: 20695 US ST 24 ADDRESS:
CSZ: DEFIANCE, OH 43512 CSZ:
PHONE: PHONE:

USE TYPE - RESIDENTIAL: OTHER:

ZONING INFORMATION

DIST: LOT DIM: AREA: FYRD: SYRD: RYRD:
MAX HT: # PKG SPACES: # LOADING SP: MAX LOT COV:

BOARD OF ZONING APPEALS:


WORK TYPE - NEW: REPLMNT: ADD'N: ALTER: REMODEL:

WORK INFORMATION

SIZE - LGTH: WIDTH: STORIES: LIVING AREA SF:
GARAGE AREA SF: HEIGHT: BLDG VOL DEMO PERMIT:

WORK DESCRIPTION
ZONING PERMIT

| FEE DESCRIPTION | PAID DATE | FEE AMOUNT DUE |
|---------------------|-----------|----------------|
| PLAN REV INSPEC FEE | 09-25-02 | 50.00 |
| ZONING PERMIT | | 25.00 |

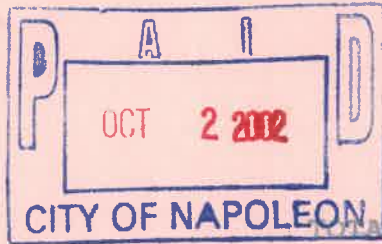

TOTAL FEES DUE 75.00

10/2/02
DATE

[Signature]
APPLICANT SIGNATURE

DIVISION OF BUILDING & ZONING
 PH (419) 523-4019
 FAX (419) 522-4333

P E R M I T

CITY OF NAPOLEON
 122 W RIVERVIEW AVE
 NAPOLEON, OHIO 43525

PERMIT NO: 1243 DATE ISSUED: 08-22-02 ISSUED BY: BMS

JOB LOCATION: 1500 BLENWOOD AVE EST. COST:

LOT #:

OWNER: KATHLEEN HORN ONLINE
 ADDRESS: 2990 W 24
 DIST: DISTANCE ON ASSESS
 PHONE:
 OTHER:

JOB TYPE - RESIDENTIAL

ZONING INFORMATION

DIST: LOT DIM: AREA: YARD: YARD: YARD:
 MAX FT: 4 TWO STORIES: + LOADING ZONE: MAX LOT COV: YARD: YARD: YARD:

BOARD OF ZONING APPEALS

WORK TYPE - NEW: EXEMPT: VARI W: ALTER: REWORK:

WORK INFORMATION

PIKE - LIGHT: WIDTH: HEIGHT: BLDG VOL DEMO PERMIT: LIVING AREA SQ FT

WORK DESCRIPTION

THE DESCRIPTION: PAID DATE: EST AMOUNT DUE

PLAN REV (MAY) THE: 08-22-02: 20.00
 ZONING PERMIT: 20.00



12.00

[Signature]
 APPLICANT SIGNATURE

[Signature]
 DATE

CITY OF NAPOLEON

ELECTRIC METER BASE RELEASE FORM

THIS DOCUMENT ENTITLES THE HOLDER TO "ONE" ELECTRIC METER BASE
(Please pickup at the City operations garage 1775 Industrial Drive).

PERMIT #: 1345

ISSUED: 09-25-2002

JOB LOCATION: 1500 GLENWOOD AVE

WORK DESCRIPTION: ZONING PERMIT

OWNER: MANUFACTURED HOMES UNLIMITED

ADDRESS: 20695 US ST 24 DEFIANCE, OH 43512

OWNER PHONE:

CONTRACTOR: SELF

ADDRESS:

CONTRACTOR PHONE:

ELECTRIC SERVICE UPGRADE _____ NEW SERVICE INSTALLATION

INDUSTRIAL _____ COMMERCIAL RESIDENTIAL _____ 1PHASE 3PHASE _____

SIZE OF SERVICE 100AMP _____ 150AMP _____ 200AMP 400AMP _____ OTHER _____

HUB SIZE - 1 1/4" _____ 1 1/2" _____ 2"

DESIRED VOLTAGE 120/240 OTHER _____

UNDERGROUND SERVICE _____ OVERHEAD SERVICE

=====

DATE COMPLETED: _____ APPROVED BY: _____

OLD METER NUMBER: _____ NEW METER NUMBER: _____

COMMENTS:

Manufactured Homes Unlimited, Inc.
20695 U.S. 24 Defiance, Ohio 43512
419-784-9666

September 25, 2002


Dear Mr. Damman:

Per our conversation, this letter is to let you know that Homes Unlimited will pour a concrete approach for the new sales lot at 1500 Glenwood Ave.

This concrete approach will be 8" thick and will be to the front property line or twenty feet whichever is longer.

If you have any questions, please feel free to contact me at your earliest convenience.

Sincerely,

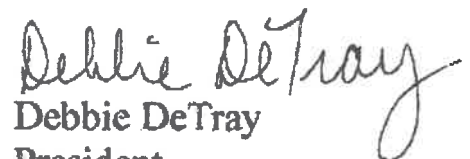
Debbie DeTray
President
M.H.U., Inc.

DD/dad

Dwenshire De-
very north.

CITY OF NAPOLEON INSPECTION FORM

PERMIT #: 1345

DATE ISSUED: 09-25-2002

JOB LOCATION: 1500 GLENWOOD AVE

OWNER: MANUFACTURED HOMES UNLIMITED

OWNER PHONE:

CONTRACTOR: SELF

CONTRACTOR PHONE:

WORK DESCRIPTION: ZONING PERMIT

PLUMBING: UNDGR _____ RGHIN _____ FINAL _____

SEWER INSP _____

MECHANICAL: UNDGR _____ RGHIN _____ FINAL _____

FURNACE REPLC _____ AIR COND _____

ELECTRICAL: UNDGR _____ RGHIN _____ FINAL _____

SERV UPGR _____

BUILDING: SITE _____ FTG _____ FNDT _____

STRUC _____ ROOF _____ EXT _____

VENT _____ ACCES _____ EGRS _____

SMKDT _____ FINAL _____

ISSUE TEMP OCCUP _____ ISSUE OCCUP _____

STRG SHED: SITE _____ FINAL _____

SIGN: FTG _____ FINAL _____

FENCE: SITE _____ FINAL _____

MISC INSP: Drive tile 9-25-02

NOTES: _____

INSPECTOR INITIALS: Bnl



To Brent Damon

Fax Number 1-419-599-8393

Phone Number 1-419-592-4010

From Tony Hoeffel

Fax Number 419-636-7488

Phone Number 419-636-2060

Subject Manufactured Homes Unlimited

Number of Pages 3

Date 9/26/02

Message

PLAT OF SURVEY

FOR REESE BROS. COMPANY


LOCATED IN THE SOUTHEAST QUARTER (1/4), OF SECTION 11, T-4S-N, R-6-E, NAPOLEON TOWNSHIP, CITY OF NAPOLEON, HENRY COUNTY, OHIO

LEGEND

- A - BULLET MONUMENT
- B - HIGHROAD CORNER BY COUNTY
- C - PIN NAIL FROM PREVIOUS SURVEYS
- D - HIGH PIN 4 CAP FROM SURVEY VOL. 37, PAGE 179
- F - HIGH PIN FROM BAXTON SURVEY FOR HITCHER TELEPHONE CASEMENT
- G - POINT ESTABLISHED BY BYPASS LIMITED ACCESS AND SECTION LINE
- H - ANGLE POINT OF LIMITED ACCESS R/W FENCE LINE

TRM, NO. C-4244-1-3
DATE: AUG. 15, 2002
SCALE: 1" = 150'

Easement to United Telephone Co.
Dated 8-10-78
Vol. 33, Page 265

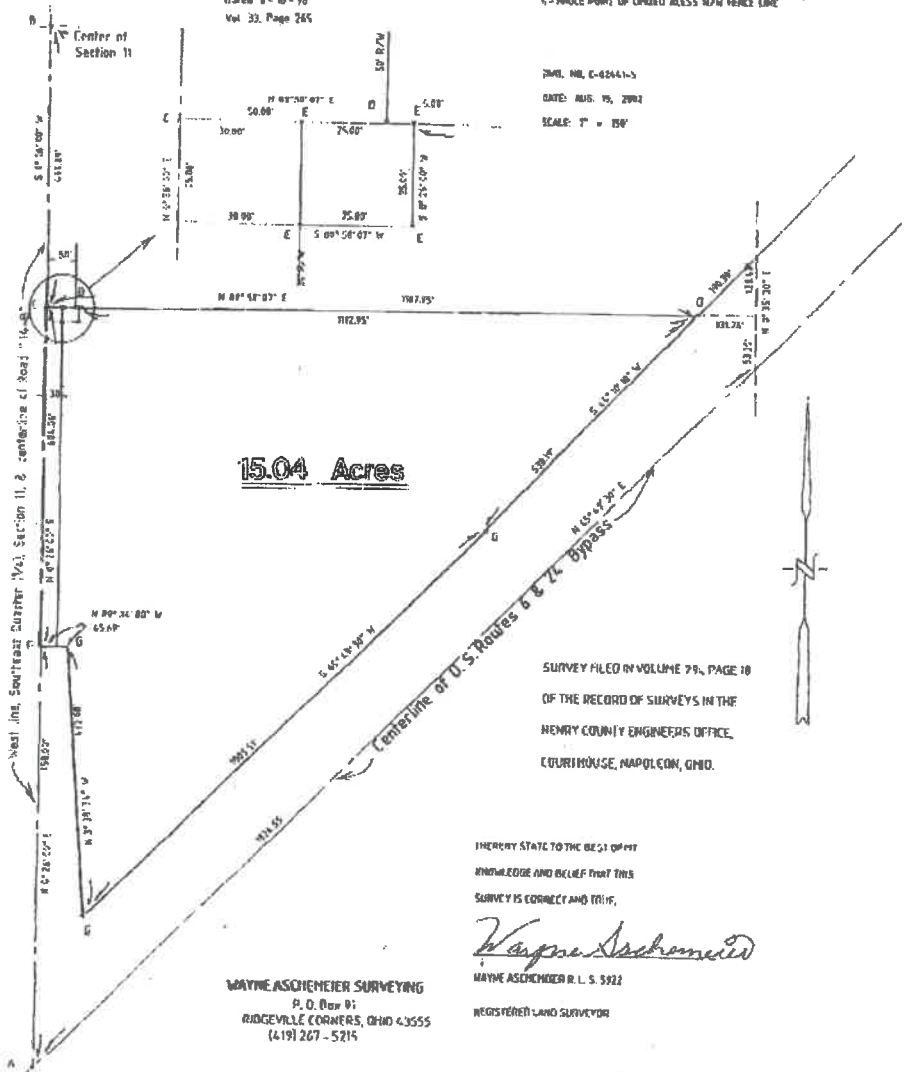

15.04 Acres

SURVEY FILED IN VOLUME 79, PAGE 18
OF THE RECORD OF SURVEYS IN THE
HENRY COUNTY ENGINEERS OFFICE,
COURTHOUSE, NAPOLEON, OHIO.

HEREBY STATE TO THE BEST OF MY
KNOWLEDGE AND BELIEF THAT THIS
SURVEY IS CORRECT AND TRUE.

Wayne Aschenmeyer

WAYNE ASCHENMEYER R. L. S. 5322
REGISTERED LAND SURVEYOR

WAYNE ASCHENMEYER SURVEYING
P. O. Box 91
RIDGEVILLE CORNERS, OHIO 43055
(419) 267-5215

FROM REISER REALTY

FAX NO. :419-599-4857

Aug 29 2002 09:23AM P1


Description of land
for Reese Bros. Company

A parcel of land situated in the Southeast Quarter (¼) of Section 11, T-5-N, R-6-E, Napoleon Township, City of Napoleon, Henry County, Ohio and is more particularly described as follows.

Beginning at a PK Nail on the West line of the Southeast Quarter (¼) of Section 11, and on the centerline of Road "14-B", said point being S 0° 26' 00" W a distance of 494.09 feet from the Center of Section 11, T-5-N, R-6-E, Napoleon Township, Henry County, Ohio. thence N 89° 58' 07" E a distance of 30.00 feet to an iron pin and cap on the right-of-way of Road "14-B"; thence continuing N 89° 58' 07" E along the same line a distance of 25.00 feet to an iron pin and cap at the corner of the United Telephone Easement; thence continuing N 89° 58' 07" E along the same line a distance 1112.95 feet to an iron pin and cap on the North limited access right-of-way of U.S. Route 6 and 24 Bypass; thence following the North right-of-way of the limited access S 44° 10' 10" W a distance of 538.19 feet to a point; thence S 45° 49' 30" W a distance of 1005.51 feet to a point; thence N 3° 38' 34" W a distance of 482.68 feet to a point; thence N 89° 34' 00" W a distance of 45.69 feet to a point on the West line of the Southeast Quarter (¼) of Section 11, and on the centerline of Road "14-B"; thence N 0° 26' 00" E along said West line and centerline a distance of 604.06 feet to a PK Nail, and the PLACE OF BEGINNING.

Containing 15.04 acres of land more or less but subject to all legal highways and easements of public record and of record in respective utility offices.

Survey filed in Volume 29, Page 18 of the record of surveys in the Henry County Engineers Office, Courthouse, Napoleon, Ohio.

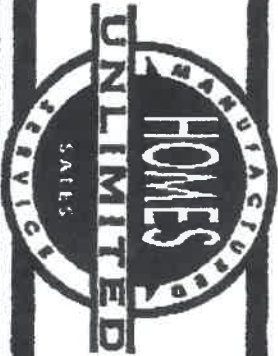

20695 U.S. RT. 24 - DEFIANCE, OH.
P 419-784-9666
F 419-784-9666

DATE: 9-18-02

PAGES: _____

TO: Brent Hamman

FROM: Bob Retzky - Jeff Miller


MESSAGE:

.....
.....
.....

In-House Financing - Land Home Packages - New & Used Homes - Modular Homes - Trades Welcome




Please Review

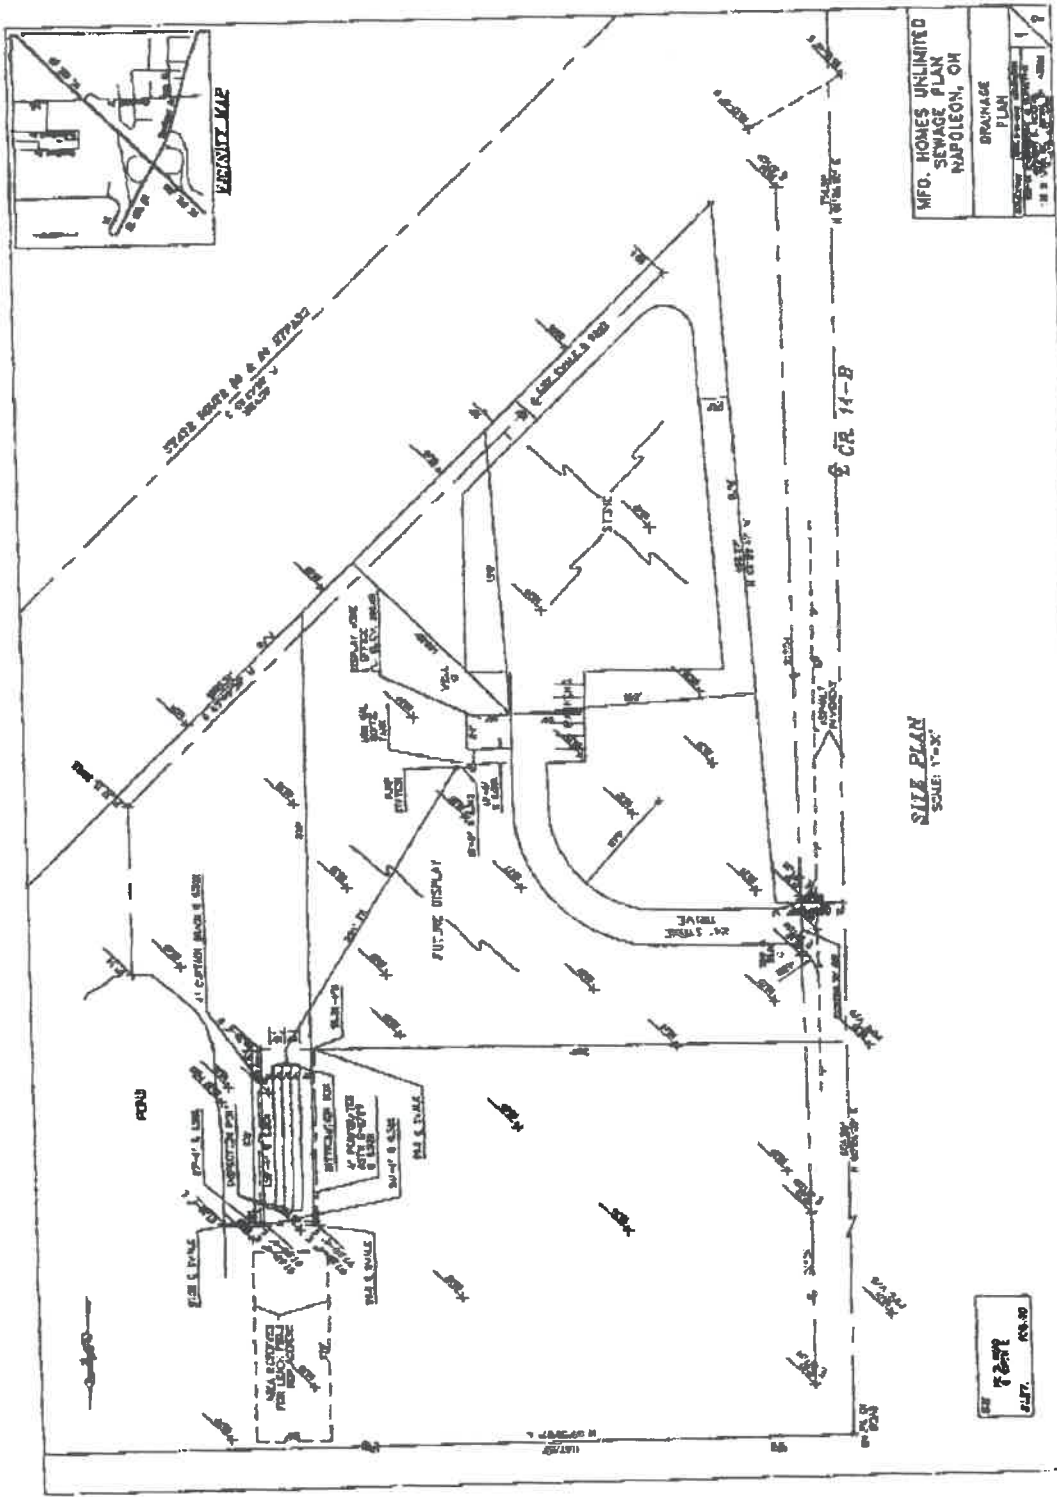

ENG. DRAWG. SEALED

DUST CONTROL

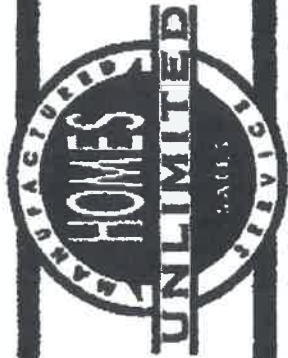

20695 U.S. RT. 24 - DEFIANCE, OH.
 P 419-784-9666
 F 419-784-9666



DATE: 9-26

PAGES: _____

TO: Joe Kleiner

FROM: Jeff Miller

MESSAGE:

.....

.....

In-House Financing - Land Home Packages - New & Used Homes - Modular Homes - Trades Welcome



PHYSICAL PROPERTIES (Minimum Average Roll Values)

| Test Method | Units | TNS W100 | TNS W200 | TNS W300 | TNS M404 | TNS M706 |
|-------------|-------------|-----------|----------|----------|-----------|-----------|
| ASTM D 3776 | oz/sy | n/a | 4.0 | 6.0 | n/a | n/a |
| ASTM D 4632 | lbs. | 125 x 100 | 200 | 300 | 365 x 200 | 370 x 250 |
| ASTM D 4632 | % | 15 | 15 | 15 | 24 x 7 | 16 x 15 |
| ASTM D 4533 | lbs. | 60 | 70 | 120 | 115 x 75 | 100 x 60 |
| ASTM D 4833 | lbs. | 60 | 100 | 120 | 115 | 135 |
| ASTM D 3786 | psi | 300 | 450 | 600 | 500 | 480 |
| ASTM D 4491 | l/sec | 0.20 | 0.04 | 0.02 | 1.36 | 0.28 |
| ASTM D 4491 | cm/sec | n/a | n/a | n/a | 0.09 | 0.01 |
| ASTM D 4491 | gpm/sq. ft. | n/a | n/a | n/a | 100 | 18 |
| ASTM D 4751 | U.S. Sieve | 20 | 40 | 70 | 40 | 70 |
| ASTM D 4355 | %, hrs. | 70 | 90, 700 | 90, 700 | 90, 500 | 90, 500 |

Property

Weight (typical)

Grab Tensile Strength

Grab Elongation

Trapezoidal Tear

Puncture Resistance

Mullen Burst

Permittivity

Permeability

Water Flow

A.O.S.

U.V. Resistance

Packaging*

| | | | | |
|--|------------|------------|------------|----------|
| Roll Dimensions - Feet | 12.5 x 432 | 12.5 x 360 | 12.5 x 300 | 12 x 300 |
| Square Yards Per Roll | 17.5 x 309 | 17.5 x 258 | 417 | 400 |
| Estimated Roll Weight (gross) - Pounds | 600 | 500 | 156 | 145 |

* Packaging for TNS W100 is: 24 or 36" wide, in 100, 300, or 750 foot lengths.

TNS Advanced Technologies

681 DeYoung Road
Greer, South Carolina 29651
Phone: (800) 867-5181
Fax: (864) 879-4639

TNS W200L WOVEN GEOTEXTILE FABRIC PRODUCT DESCRIPTION SHEET

TNS W200L is a woven polypropylene material offering optimum performance when used in stabilization applications. Produced from first quality raw materials, it provides the perfect balance of strength and separation which are capable of functioning exceptionally in a wide range of performance requirements. Unless indicated below, all listed properties are Minimum Average Roll Values:

| Property | Test Method | TNS W200L |
|--------------------------------|-------------|-----------|
| Weight (Typical) (oz/sy) | ASTM D 3776 | 3.4 |
| Grab Tensile Strength (lbs.) | ASTM D 4632 | 140 |
| Grab Elongation (%) | ASTM D 4632 | 15 |
| Trapezoidal Tear (lbs.) | ASTM D 4533 | 45 |
| Puncture Resistance (lbs.) | ASTM D 4833 | 65 |
| Mullen Burst (psi) | ASTM D 3786 | 325 |
| Permittivity (1/sec) | ASTM D 4491 | 0.05 |
| Water Flow | ASTM D 4491 | 4 |
| A.O.S. (U.S. Sieve) | ASTM D 4751 | 50 |
| U.V. Resistance (% @ 500 hrs.) | ASTM D 4355 | 70 |

Standard roll packaging for TNS W200L is 12.5' x 432 and 17.5' x 309' (600 sy per roll). Longer rolls and sewn roll widths are available on request subject to minimum quantities.

To the best of our knowledge, the information contained herein is accurate. However, TNS Advanced Technologies cannot anticipate all conditions under which TNS product information and our products, or the products of other manufacturers in combination with our products, may be used. We accept no responsibility for results obtained by the application of this information or the safety or suitability of our products either alone or in combination with other products. Final determination of the suitability of any information or material for the use contemplated, of its manner of use, and whether the suggested use infringes any patents is the sole responsibility of the user.

w200l.wj60

6/24/96



20695 U.S. RT. 24 - DEFIANCE, OH.
 P 419-784-9666
 F 419-784-9666



DATE: 9-26

PAGES: _____

TO: Joe Kleiner

FROM: Jeff Miller

MESSAGE:

In-House Financing - Land Home Packages - New & Used Homes - Modular Homes - Trades Welcome



PHYSICAL PROPERTIES (Minimum Average Roll Values)

| Property | Test Method | Units | TNS W100 | TNS W200 | TNS W300 | TNS M404 | TNS M706 |
|-----------------------|-------------|------------|-----------|----------|----------|-----------|-----------|
| Weight (typical) | ASTM D 3776 | oz/sy | n/a | 4.0 | 6.0 | n/a | n/a |
| Grab Tensile Strength | ASTM D 4632 | lbs. | 125 x 100 | 200 | 300 | 365 x 200 | 370 x 250 |
| Grab Elongation | ASTM D 4632 | % | 15 | 15 | 15 | 24 x 7 | 16 x 15 |
| Trapezoidal Tear | ASTM D 4533 | lbs. | 60 | 70 | 120 | 115 x 75 | 100 x 60 |
| Puncture Resistance | ASTM D 4833 | lbs. | 60 | 100 | 120 | 115 | 135 |
| Mullen Burst | ASTM D 3786 | psi | 300 | 450 | 600 | 500 | 480 |
| Permittivity | ASTM D 4491 | l/sec | 0.20 | 0.04 | 0.02 | 1.36 | 0.28 |
| Water Flow | ASTM D 4491 | cm/sec | n/a | n/a | n/a | 0.09 | 0.01 |
| A.O.S. | ASTM D 4491 | gpm/sq.ft. | n/a | n/a | n/a | 100 | 18 |
| U.V. Resistance | ASTM D 4751 | U.S. Sieve | 20 | 40 | 70 | 40 | 70 |
| | ASTM D 4355 | % hrs. | 70 | 90.700 | 90.700 | 90.500 | 90.500 |

Packaging*

| Roll Dimensions – Feet | 12.5 x 432 | 12.5 x 360 | 12.5 x 300 | 12 x 300 |
|--|------------|------------|------------|----------|
| Square Yards Per Roll | 17.5 x 309 | 17.5 x 258 | 500 | 400 |
| Estimated Roll Weight (gross) – Pounds | 600 | 500 | 417 | 400 |
| | 175 | 207 | 156 | 145 |

* Packaging for TNS W100 is: 24 or 36" wide, in 100, 300, or 750 foot lengths.

TNS Advanced Technologies

681 DeYoung Road
Greer, South Carolina 29651
Phone: (800) 867-5181
Fax: (864) 879-4639

TNS W200L WOVEN GEOTEXTILE FABRIC PRODUCT DESCRIPTION SHEET

TNS W200L is a woven polypropylene material offering optimum performance when used in stabilization applications. Produced from first quality raw materials, it provides the perfect balance of strength and separation which are capable of functioning exceptionally in a wide range of performance requirements. Unless indicated below, all listed properties are Minimum Average Roll Values:

| Property | Test Method | TNS W200L |
|--------------------------------|-------------|-----------|
| Weight (Typical) (oz/sy) | ASTM D 3776 | 3.4 |
| Grab Tensile Strength (lbs.) | ASTM D 4632 | 140 |
| Grab Elongation (%) | ASTM D 4632 | 15 |
| Trapezoidal Tear (lbs.) | ASTM D 4533 | 45 |
| Puncture Resistance (lbs.) | ASTM D 4833 | 65 |
| Mullen Burst (psi) | ASTM D 3786 | 325 |
| Permittivity (1/sec) | ASTM D 4491 | 0.05 |
| Water Flow | ASTM D 4491 | 4 |
| A.O.S. (U.S. Sieve) | ASTM D 4751 | 50 |
| U.V. Resistance (% @ 500 hrs.) | ASTM D 4355 | 70 |

Standard roll packaging for TNS W200L is 12.5' x 432 and 17.5' x 309' (600 sy per roll). Longer rolls and sewn roll widths are available on request subject to minimum quantities.

To the best of our knowledge, the information contained herein is accurate. However, TNS Advanced Technologies cannot anticipate all conditions under which TNS product information and our products, or the products of other manufacturers in combination with our products, may be used. We accept no responsibility for results obtained by the application of this information or the safety or suitability of our products either alone or in combination with other products. Final determination of the suitability of any information or material for the use contemplated, of its manner of use, and whether the suggested use infringes any patents is the sole responsibility of the user.

w200l.wjw

6/24/96



20695 U.S. RT. 24 - DEFIANCE, OH.
P 419-784-9666
F 419-784-9666

DATE: 10-1-02

PAGES: 2

TO: Joe Kleiner

FROM: Jeff Miller

MESSAGE:

.....
.....
.....

In-House Financing - Land Home Packages - New & Used Homes - Modular Homes - Trades Welcome



Engineered Synthetic Products, Inc.

Representing
TNS Advanced Technologies & Skaps Industries

405 Hood Road
Lilburn GA 30047
Phone: (770) 564-1857
Fax: (770) 564-1818

October 1, 2002

Homes Unlimited
20695 US Rte 24
Defiance OH

RE: Defiance OH

Dear Sir/Madam:

This letter is in reference to TNS Woven geotextiles used with a stone aggregate base. In our experience dealing with separation fabrics used to stabilize weak subgrades we have found that 4-6 inches of stone aggregate is an effective way to eliminate excessive fill and still provide the necessary stabilization and reinforcement. TNS woven geotextiles are ideal for this type of application. Please call if you have any questions.

Sincerely,



Brent Beckham
TNS Advanced Technologies

TNS Advanced Technologies


9855 Greenville Hwy., Bldg. F
Spartanburg, SC 29301
(770) 564-1857

TNS Woven Series


The TNS Woven Series of geotextile products are comprised of UV stabilized polypropylene slit film. This series of polypropylene geotextiles provides excellent puncture and tear-resistant properties in addition to high tensile strength, thereby making them ideal for use in stabilizing road bases by separating and confining support layers.

The TNS Woven Series is used for separation, confinement and reinforcement of roadways and site construction. TNS wovens provide stabilization and reinforcement when heavy loads are expected. This series is effective in the construction of low embankments over weak subgrades eliminating the need for costly excavation and replacement with expensive fill.


Subgrade/Aggregate Separation

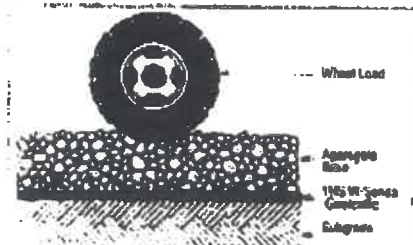


Aggregate Confinement

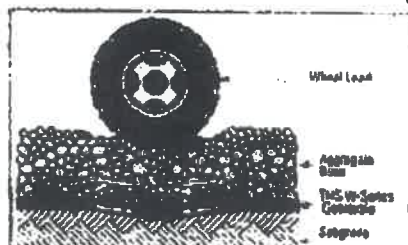

Subgrade Load Distribution

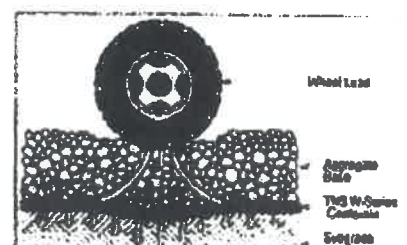

TOTAL P.02

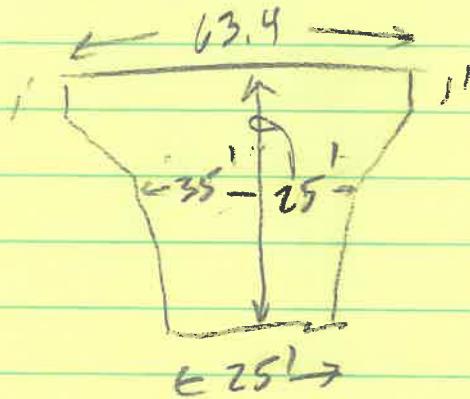


990 SF

$$999 \text{ SF} \times T = 22 \text{ CY}$$

$$999 \text{ SF} (T) = 594 \text{ CF}$$

$$T = .6' \text{ OR } 7.2''$$

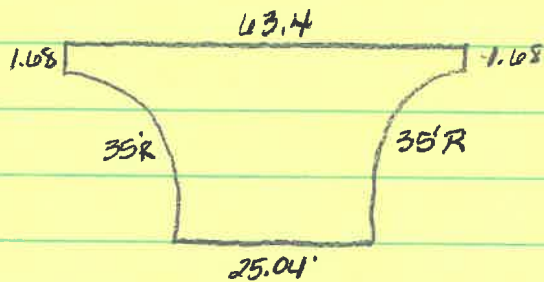

929.0100 FE²

