

# I-T-E Molded Case Circuit Breakers

EQ 125 A Frame—QP Plug-in

**JIM SPEISER & SONS, INC.**

Electrical Contractors  
 P.O. BOX 545  
 NAPOLEON, OHIO 43545  
 419-599-1846

FOR LOAD CENTERS

APPROVED BY *[Signature]*


DATE 2-6-87

Breaker Type	Ampere Rating	Complete Breaker Unenclosed		UL Interrupting Ratings (kA) (RMS Symmetrical Amperes)											
		Catalog Number	List Price	Volts AC						Volts DC					
				120	120/240	240	277	480	600	125	250				
QP 1-Pole 120/240 V AC Ⓢ	15 <sup>(1)</sup> Ⓢ <sup>(2)</sup>	Q115	\$ 10.60	Non-Interchangeable Trip		10									
	20 <sup>(1)</sup> Ⓢ <sup>(2)</sup>	Q120	10.60			10									
	25 <sup>(1)</sup> Ⓢ	Q125	10.60			10									
	30 <sup>(1)</sup> Ⓢ	Q130	10.60			10									
	35 <sup>(1)</sup> Ⓢ	Q135	10.60			10									
	40 <sup>(1)</sup> Ⓢ	Q140	10.60			10									
	45 <sup>(1)</sup> Ⓢ	Q145	10.60			10									
	50 <sup>(1)</sup> Ⓢ	Q150	10.60			10									
	55 <sup>(1)</sup> Ⓢ	Q155	10.60			10									
	60 <sup>(1)</sup> Ⓢ	Q160	10.60			10									
	70	Q170	23.00			10									
	SHIPPING: 6 per carton, 90 per master carton. (Wt. 26 lbs.)														
	QP 2-Pole 120/240 V AC Common Trip. Ⓢ	15 <sup>(1)</sup> Ⓢ	Q215		24.00	Non-Interchangeable Trip		10							
20 <sup>(1)</sup> Ⓢ		Q220	24.00		10										
25 <sup>(1)</sup> Ⓢ		Q225	24.00		10										
30 <sup>(1)</sup> Ⓢ		Q230	24.00		10										
35 <sup>(1)</sup> Ⓢ		Q235	24.00		10										
40 <sup>(1)</sup> Ⓢ		Q240	24.00		10										
45 <sup>(1)</sup> Ⓢ		Q245	24.00		10										
50 <sup>(1)</sup> Ⓢ		Q250	24.00		10										
60 <sup>(1)</sup> Ⓢ		Q260	24.00		10										
70		Q270	50.00		10										
80		Q280	68.00		10										
90		Q290	68.00		10										
100		Q2100	68.00		10										
60	Molded Case Switch <sup>(3)</sup> Q260S	15.50													
SHIPPING: 3 per carton, 30 per master carton (Wt. 29 lbs.), 80-125 Amp, 45 per master carton (Wt. 29 lbs.)															
QP 2-Pole 240V AC Common Trip Ⓢ	15	Q235R	68.00	Non-Interchangeable Trip		10									
	20	Q240R	68.00			10									
	30	Q235R	68.00			10									
	40	Q240R	68.00			10									
	50	Q250R	68.00			10									
	60	Q260R	68.00			10									
	70	Q270R	77.00			10									
	100	Q2100R	109.00			10									
SHIPPING: 3 per carton, 15-70 Amp, 45 per master carton (Wt. 29 lbs.), 100 Amp, 2 per carton, 30 per master carton (Wt. 29 lbs.)															
QP 3-Pole 240V AC Common Trip Ⓢ	15 <sup>(1)</sup> Ⓢ	Q315	80.00	Non-Interchangeable Trip		10									
	20 <sup>(1)</sup> Ⓢ	Q320	80.00			10									
	25 <sup>(1)</sup> Ⓢ	Q325	80.00			10									
	30 <sup>(1)</sup> Ⓢ	Q330	80.00			10									
	35 <sup>(1)</sup> Ⓢ	Q335	80.00			10									
	40 <sup>(1)</sup> Ⓢ	Q340	80.00			10									
	45 <sup>(1)</sup> Ⓢ	Q345	80.00			10									
	50 <sup>(1)</sup> Ⓢ	Q350	80.00			10									
	60 <sup>(1)</sup> Ⓢ	Q360	80.00			10									
	70	Q370	105.00			10									
	80	Q380	123.00			10									
90	Q390	123.00		10											
100	Q3100	123.00		10											
SHIPPING: 2 per carton, 15-70 Amp, 30 per master carton (Wt. 29 lbs.), 90, 100 Amp, 2 per carton, 30 per master carton (Wt. 29 lbs.)															


FOR APPROVAL

- (1) UL listed for frequent switching applications (SWD duty).
- (2) HACR rated.
- (3) Non-automatic circuit interrupter.
- (4) For high wattage, tungsten-lamp loads having in-rush currents above the instantaneous trip setting of the standard breaker, add "T" suffix to catalog number.
- (5) For 400 cycle UL listed devices, add a "Y" suffix to catalog number. Add 25% to list price. Available up to 100A only, 5000A interrupting rating.

*lets Independence*

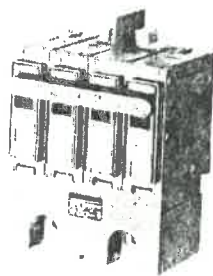

2-Pole QPP



2-Pole QPH



1-Pole QP

### IMPORTANT INFORMATION

QP Plug-in pricing consists of:

- 1 circuit breaker
- load-side pressure wire connectors (1 per pole)

All items included when ordering by the circuit breaker catalog number.

Pressure Wire Connectors  
 pages 66-67  
 Enclosures pages 68-73  
 Accessories pages 74-85

**Circuit Protection Division  
SUBMITTAL DRAWING  
I-T-E GENERAL DUTY SAFETY SWITCH**


**RAINTIGHT\*—NEMA 3R ENCLOSURE**

**JIM SPEISER & SONS, INC.**

*Electrical Contractors*  
R.R. 2 P.O. BOX 545  
NAPOLEON, OHIO 43545  
419-593-1846

APPROVED BY *J.S.*

DATE *2-6-87*

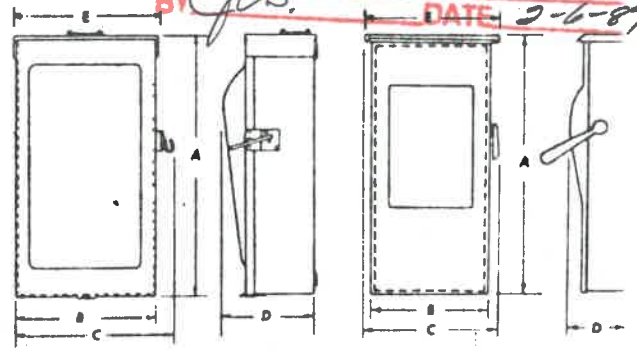


30-200 Ampere

400 Ampere Up

- 2 Pole, 2 Fuse or 3 Pole, 2 Fuse and SN; 240 VAC
- 3 Pole, 3 Fuse; 240 VAC
- 4 Pole, 3 Fuse and SN; 240 VAC
- 2 Pole, No Fuse or 3 Pole, No Fuse; 240 VAC

Catalog No.	Ampere Rating	K.O. Diagram	Shipping Weight Lbs.	DIMENSIONS—Inches					HORSEPOWER RATING ▲			
				A	B	C	D	E	240 Volt AC			
									1Phase 2 Wire		3 Phase 3 Wire	
									Std.	Max.	Std.	Max.
NFR322	60	S15	10	12½	8¾	10½	6	8¾			15	

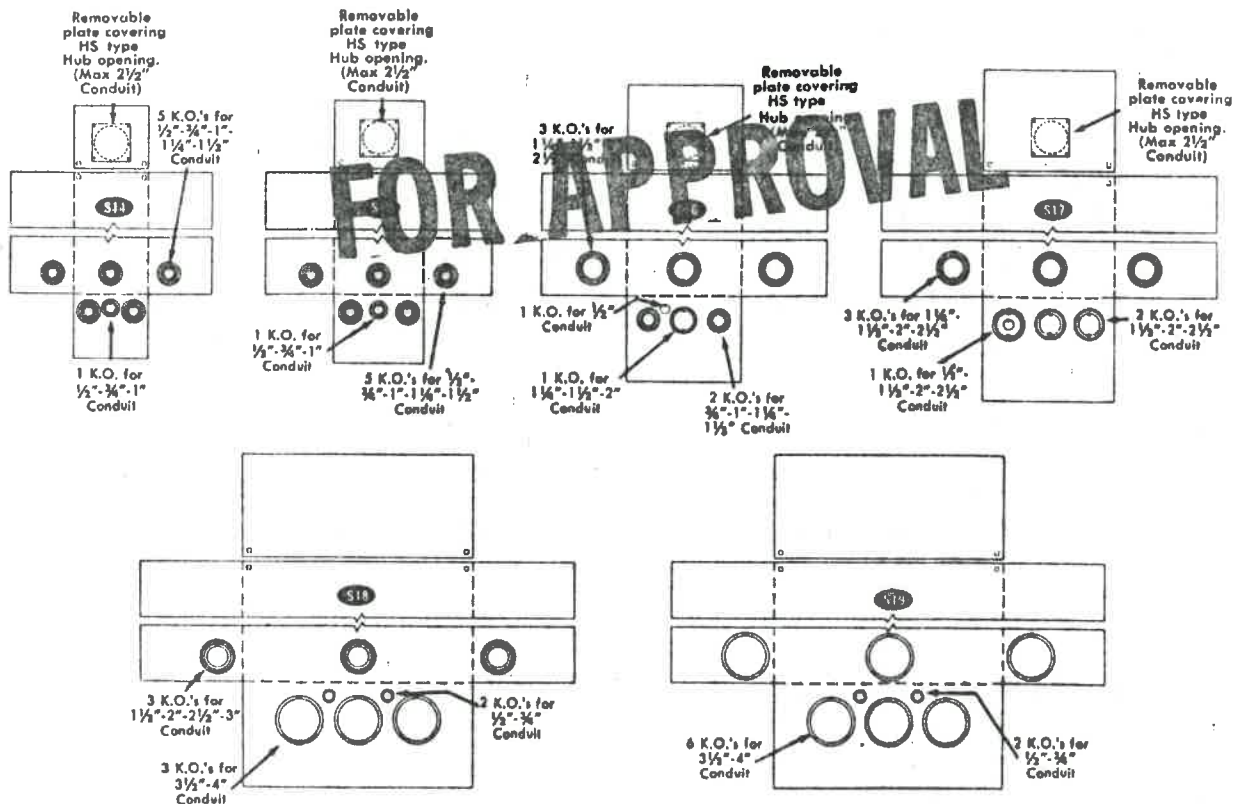

**NOTES:**

- \* All 400 and 600 ampere switches have removable end plates.
- ▲ Std.—NEC Single Element Fuse. Max.—Time Delay Fuse — suitable for starting characteristics of motor.

1.2-3P  
Supersedes 1.2-3N