

TABLE 8-6.2.4(b)
PIPER — DIAMETER COMBINATIONS

PIPE SIZE	NUMBER OF RODS			
	5/8"	3/4"	7/8"	1"
4"	2	2	X	X
6"	2	2	2	X
8"	3	2	2	X
10"	4	3	2	2
12"	6	4	3	2

TABLE 8-6.2.9
BEARING FACE OF THRUST BLOCKS

PIPE SIZE	90° ELBOW SQ. FT.	45° ELBOW SQ. FT.	TEES, PLUGS CAPS, HYD. SQ. FT.
4"	2	2	2
6"	5	3	4
8"	8	5	6
10"	13	7	9
12"	18	10	13

UNDERGROUND

ALL WORK AND MATERIALS SHALL BE SUBJECT TO INSURANCE COMPANY REGULATIONS. ALL WATER PROTECTION SERVICE.

PIPE SHALL BE DUCTILE IRON WITH A MINIMUM TENSILE STRENGTH OF 42,000 P.S.I. AND SHALL BE MECHANICALLY JOINT TYPE UNLESS OTHERWISE NOTED. FITTING SHALL BE DUCTILE IRON UNLESS OTHERWISE NOTED.

PIPE SHALL BE PROPERLY SUPPORTED USING CONCRETE THROUGH THE ENTIRE LENGTH OF THE TRENCH. ALL JOINTS SHALL BE PROPERLY JOINTED. ALL JOINTS SHALL BE PROPERLY JOINTED. ALL JOINTS SHALL BE PROPERLY JOINTED.

ALL NEW UNDERGROUND PIPING SHALL BE INSTALLED IN TRENCHES NOT LESS THAN 18" DEEP. TRENCHES SHALL BE PROPERLY SHORED OR BRACED. TRENCHES SHALL BE PROPERLY SHORED OR BRACED.

ALL NEW UNDERGROUND PIPING SHALL BE INSTALLED IN TRENCHES NOT LESS THAN 18" DEEP. TRENCHES SHALL BE PROPERLY SHORED OR BRACED. TRENCHES SHALL BE PROPERLY SHORED OR BRACED.

ALL NEW UNDERGROUND PIPING SHALL BE INSTALLED IN TRENCHES NOT LESS THAN 18" DEEP. TRENCHES SHALL BE PROPERLY SHORED OR BRACED. TRENCHES SHALL BE PROPERLY SHORED OR BRACED.

ALL NEW UNDERGROUND PIPING SHALL BE INSTALLED IN TRENCHES NOT LESS THAN 18" DEEP. TRENCHES SHALL BE PROPERLY SHORED OR BRACED. TRENCHES SHALL BE PROPERLY SHORED OR BRACED.

ALL NEW UNDERGROUND PIPING SHALL BE INSTALLED IN TRENCHES NOT LESS THAN 18" DEEP. TRENCHES SHALL BE PROPERLY SHORED OR BRACED. TRENCHES SHALL BE PROPERLY SHORED OR BRACED.

ALL NEW UNDERGROUND PIPING SHALL BE INSTALLED IN TRENCHES NOT LESS THAN 18" DEEP. TRENCHES SHALL BE PROPERLY SHORED OR BRACED. TRENCHES SHALL BE PROPERLY SHORED OR BRACED.

WATER


DATE & TIME

BY

STATIC: 6'

RESIDUAL: 5'

FLOWING: 1'

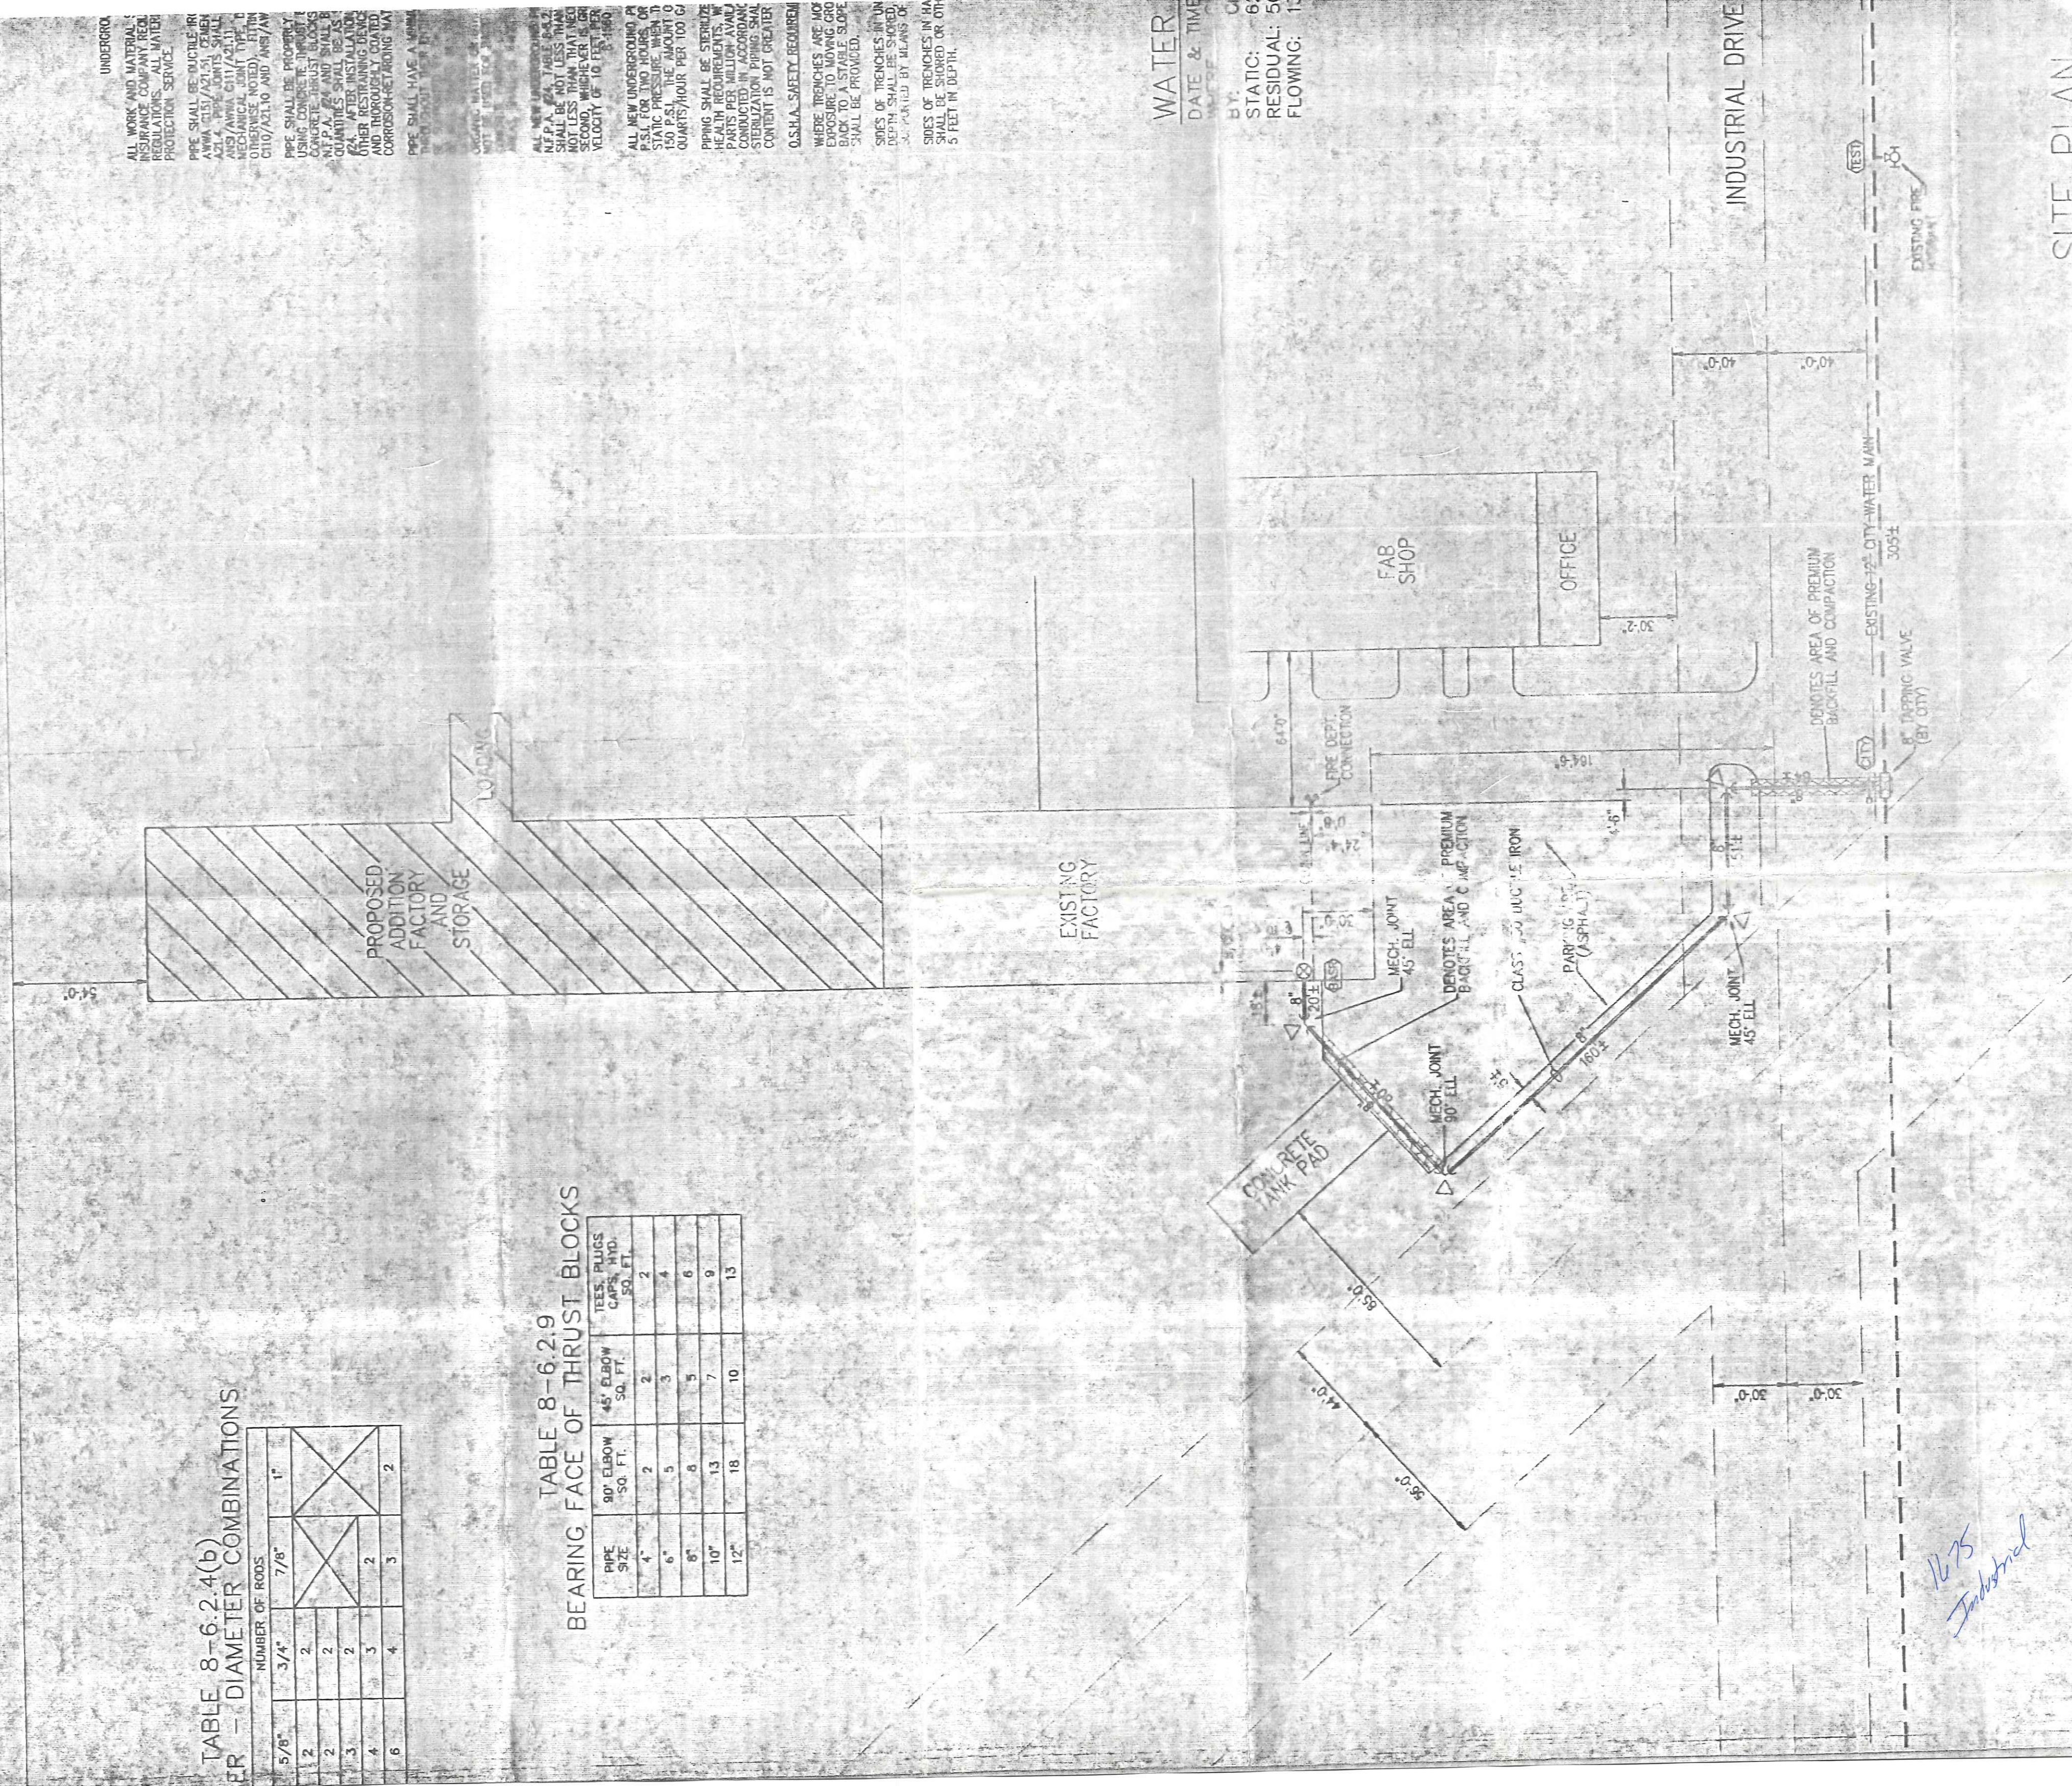

1675 Industrial