

Res # 305
 Sheffield Ave.

Date Installed: 9-23-09
 Installed by: Vernon Nagel Constr.
 Inspected by: Rex Moll

Concrete Drive



~ PROPOSAL ~
VERNON
NAGEL
 INCORPORATED



O 154 County Road 11-C
 Napoleon, OH 43545
 Email: mnagel@henry-net.com

GENERAL CONTRACTOR

Phone (419) 592-3861
 Fax (419) 592-1537
 Website: nagelinc.net

NAME: <u>Roger Weirauch</u>	PROJECT NAME: <u>Sanitary Sewer Tap</u>
ADDRESS: <u>305 Sheffield Ave.</u>	PROJECT LOCATION: <u>Sheffield Ave. - Napoleon, OH</u>
CTY/STATE: <u>Napoleon, OH</u>	DATE: <u>September 18, 2009</u>
ZIP: <u>43545</u>	PHONE: <u>419-592-4010</u>
ATTN: <u>Chad Lulfs, P.E., P.S.</u>	FAX: <u>419-599-8393</u>

We hereby submit specifications and estimates for:

ITEM	DESCRIPTION	QUANTITY	UNIT	UNIT PRICE	TOTAL
1	PAVEMENT SAWING	86	LF	\$2.50	\$215.00
2	ASPHALT PAVEMENT & CURB REMOVAL	14	SY	\$25.00	\$350.00
3	SDR-26 (HEAVY DUTY) 8"X6" WYE W/ 2 - SDR-26 SOLID SLEEVES	1	LS	\$235.00	\$235.00
4	6" SDR-35 SANITARY SEWER PIPE	40	LF	\$60.00	\$2,400.00
5	GRANULAR BACKFILL	45	CY	\$35.00	\$1,575.00
6	4" ASPHALT SURFACE COURSE (INSTALLED IN 2 LIFTS)	1.5	CY	\$400.00	\$600.00
7	CONCRETE CURB REPLACEMENT	6	LF	\$30.00	\$180.00
8	6" SANITARY CLEANOUT W/ INVERTED CAP	1	EA	\$200.00	\$200.00
9	TOPSOIL/SEEDING/MULCHING/FERTILIZING	1	LS	\$500.00	\$500.00
10	TRAFFIC CONTROL	1	LS	\$150.00	\$150.00
11	MOBILIZATION	1	LS	\$200.00	\$200.00
					\$6,605.00

GENERAL CONDITIONS

Home owner shall be responsible for all permits and associated tap/permit fees.
 6" sewer tap shall terminate at the existing right-of-way line with a 6" cleanout and 6" plug.
 Existing 8" sewer main shall be assumed deep enough to provide positive drainage from house. Vernon Nagel cannot be held responsible for 8" sewer not being deep enough to allow enough fall from house.
 6" sewer shall be laid at approx. a 1% grade from tap at the main to cleanout at the right-of-way unless instructed otherwise.
 Estimate does not include sawing or removal of existing concrete pavement if it exists under existing asphalt.
 6" sewer cleanout shall include a 6" SDR-35 Tee, 6" riser pipe, 6" inverted cap, and 6" plug.
 Estimate does not include hooking up sewer from right-of-way to house.
 Asphalt prices include sealing all joints and new curb.
 Estimate does not include plugging or removal of existing 6" sanitary service connection.
 Project will not be scheduled without acceptance of this proposal including general conditions, please return one signed copy.

We Propose hereby to furnish material and labor - complete in accordance with above specifications, for the sum of:
 Six Thousand Six Hundred Five & 00/100----- dollars \$ 6,605.00

Terms: Net Ten Days from Invoice Date. A late charge of 2% (24%APR) will be added to past due amounts.

Authorized Representative _____
 Marc Nagel


Note: This proposal is valid for 30 days

Acceptance of Proposal:

The above prices, specifications, and conditions are satisfactory and are hereby accepted. You are authorized to do the work as specified.
 Payment will be made as outlined above.

Signature: _____

Date: _____

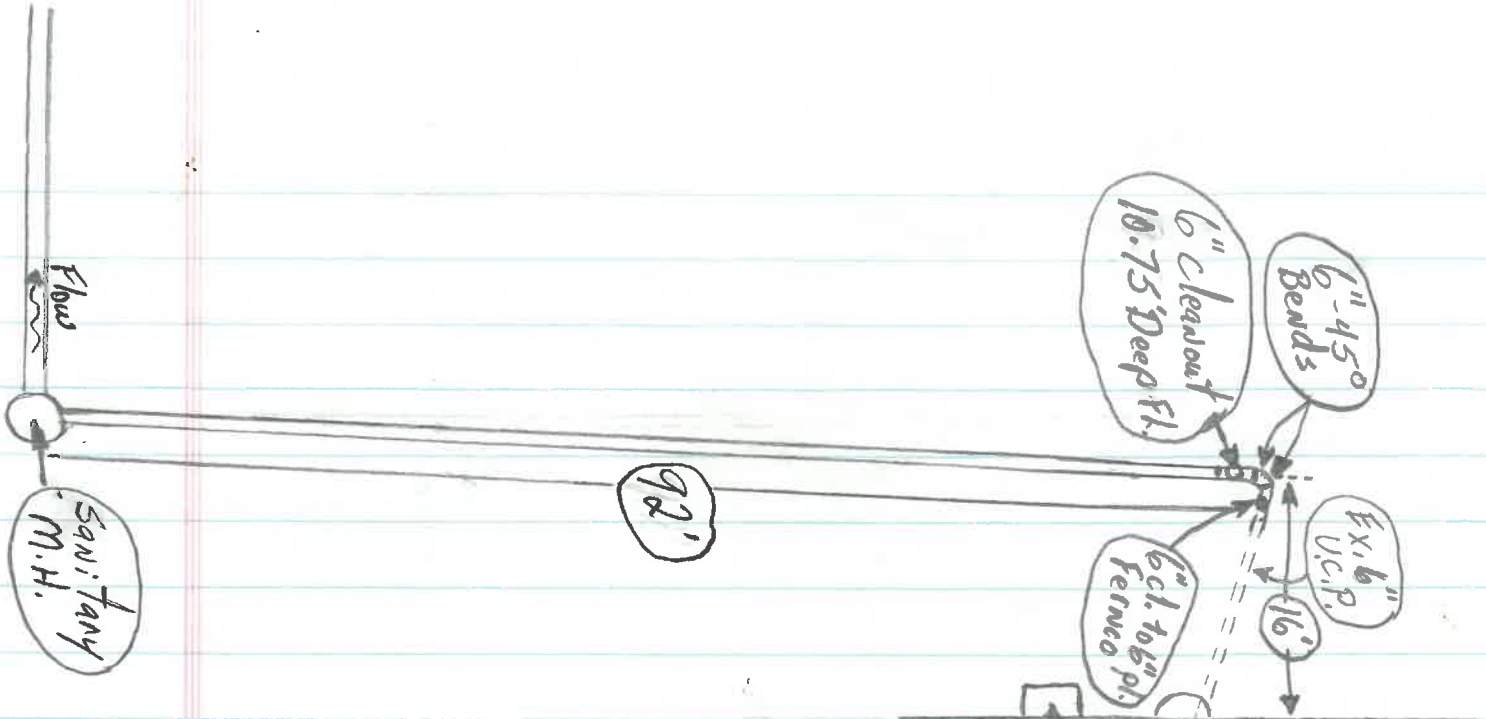

Date Installed: 9-23-09
 Installed by: Vernon Nagel Constr.
 Inspected by: Rex Mo11

